

Sneeze-wall

Kit instruction | 48" (L) x 71" (H) x 4" (W)

TOOLS REQUIRED

5mm Allen Key (Included)













Measuring tape

Marker




Cutting pliers



PARTS

	TUBE 70 15/16 "	x2		TUBE 43 15/16 "	x2		H-1	x8
	H-19	x2		M6-25B	x5		M6-N	x5
	AP-HINGE	x4		AP-ICAP	x2		AF-OSM	x2
	F-A85/8	x2		SNEEZE GUARD	x1		TIE-WRAP	x18

INSTALLATIONS TIPS

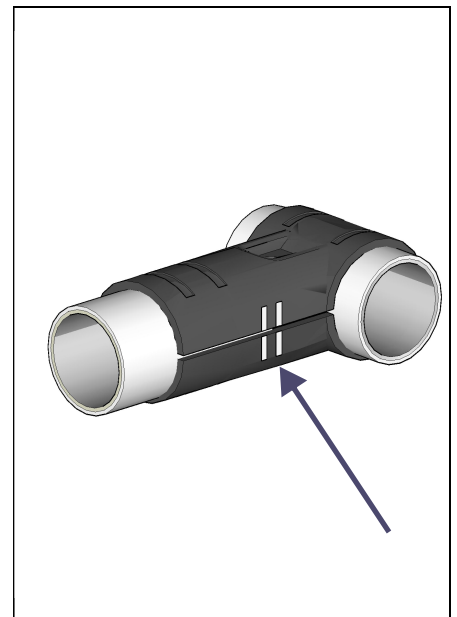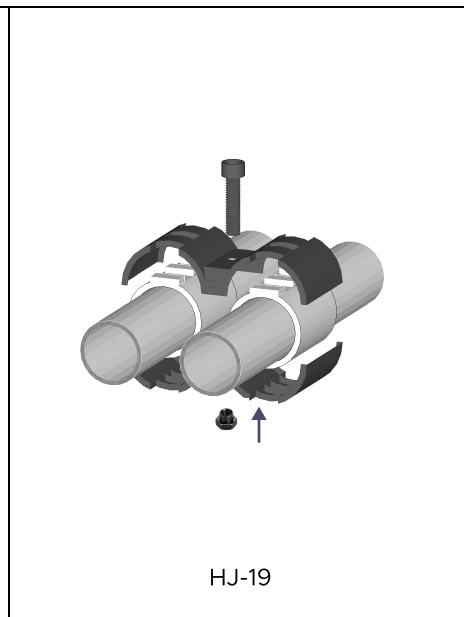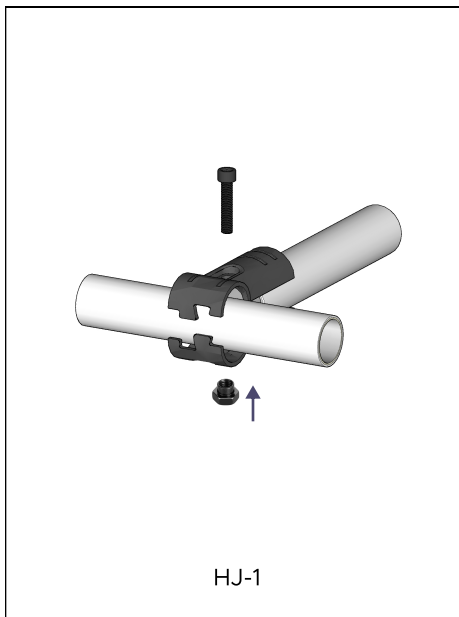

Group connectors around tube and loosely tighten nut and bolt. Insert corresponding tubes and fully tighten with 5mm allen key. Insert smaller diameter of nut into the connector. Feel for thread of bolt through nut.


For all connectors, insert tube up to the 2nd line.

Tighten all nuts and bolts properly. (12 - 14Nm torque)

QUESTIONS?


Call our customer service at **1 855 406-0253** or write us at help@tinktube.com. And for more information and watch our building video, visit the www.tinktube.com

STEP 1

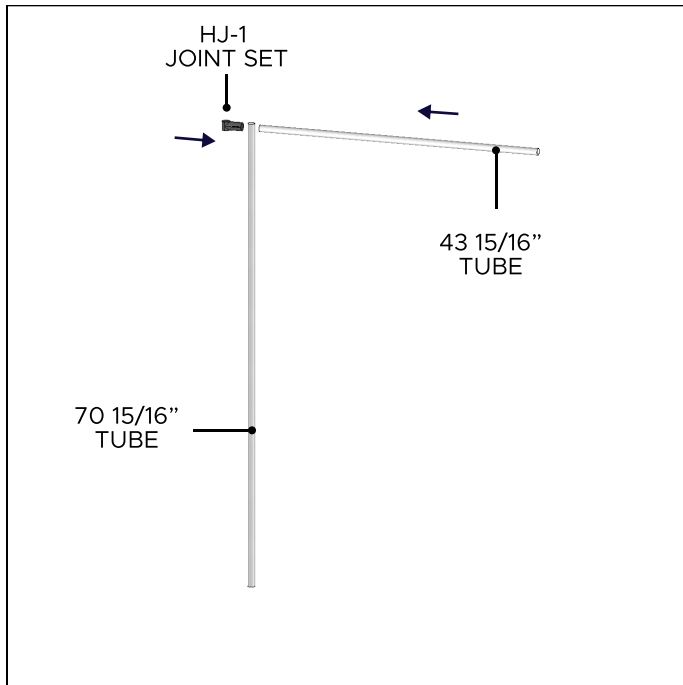


Assemble HJ-1 joint set, 70 15/16" tube and 43 15/16" tube.

STEP 2

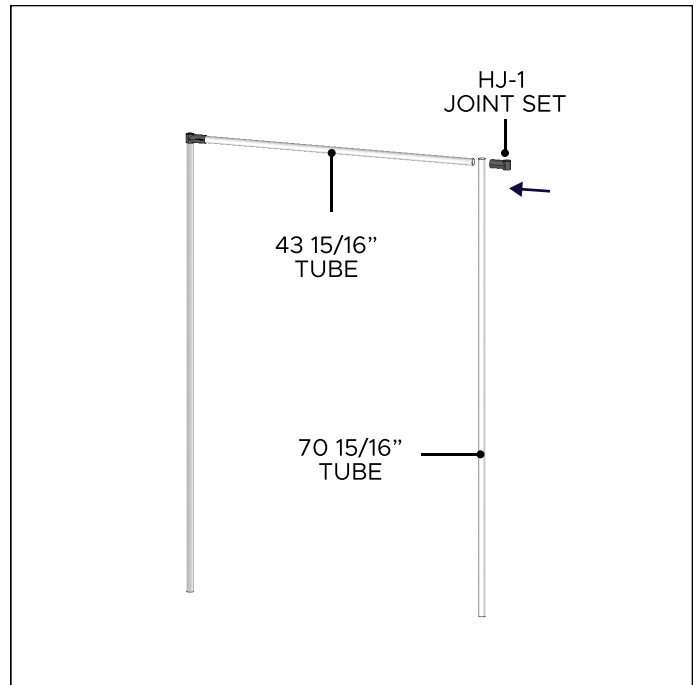


Assemble HJ-1 joint set, 70 15/16" tube and 43 15/16" tube at opposite end.

STEP 3

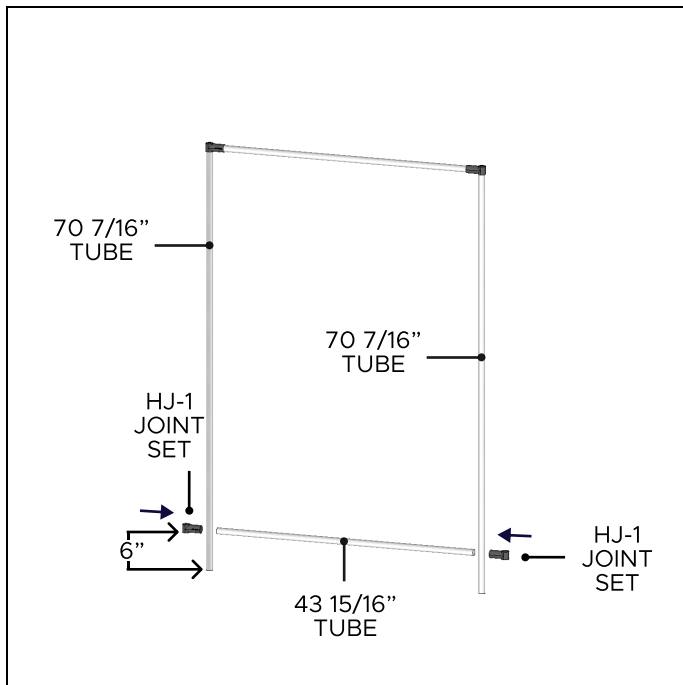


Measure 6" inches from the bottom of 70 15/16" tube, assemble HJ-1 joint set with 43 15/16" tube. Repeat at opposite end with HJ-1 joint set.

STEP 4

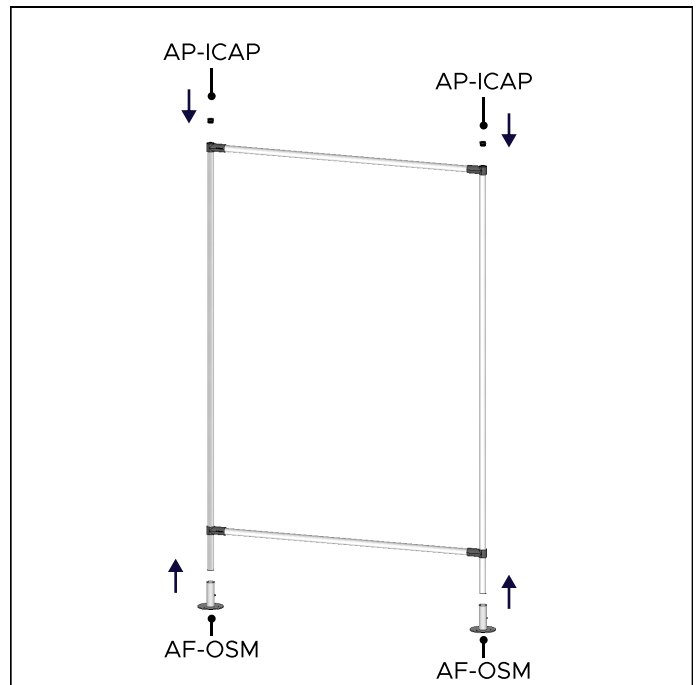


Press-fit AP-ICAP into 70 15/16" tubes. Slide AF-OSM into 70 15/16" tube and secure with F-A85/8 self-tap screw.

STEP 5

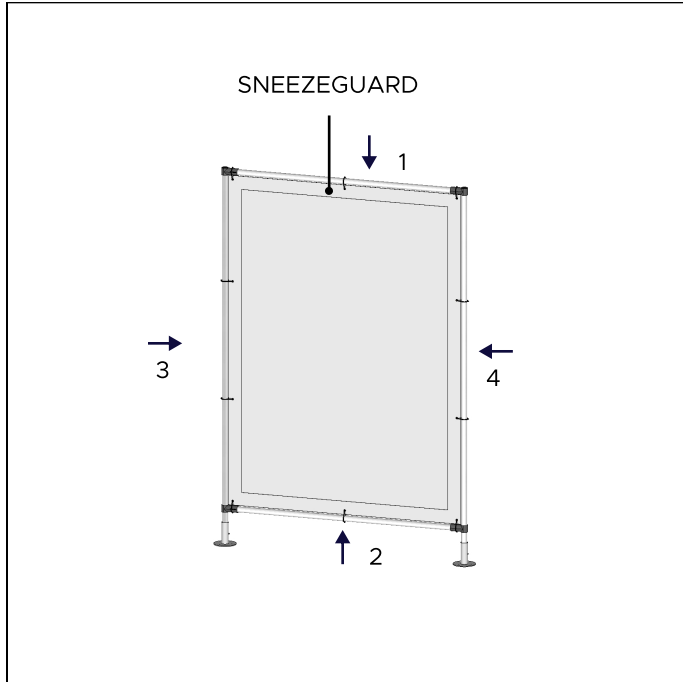

Install Sneezeguard with tie-wraps. start on top, then bottom and finish with sides. Cut excess and turn inward.

STEP 6

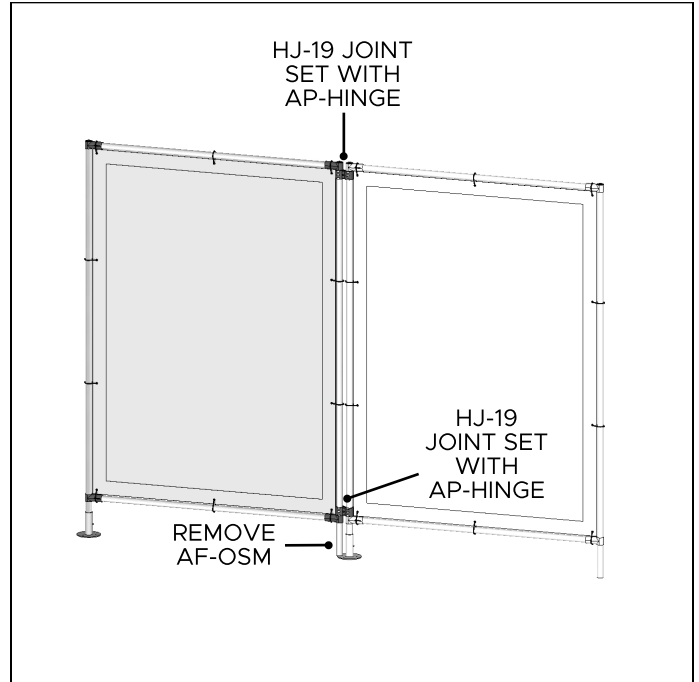

When installing multiple panels, remove AF-OSM from one of the panels to join together. Clip AP-HINGE on top / bottom, assemble HJ-19 joint sets.
